

Thermostat

General Description

Monnit's thermostat is designed specifically for remote configuration. It features an integrated motion sensor to auto detect if an area or room is occupied and can be set to enter an energy saving state when not needed. The thermostat will allow you to set a maximum and minimum temperature range for both occupied and non-occupied states.

As there are no manual buttons on the device, it prevents random adjustments by unauthorized people, making it a perfect solution for public buildings such as corporate facilities or schools and churches. It is also great for remote buildings which are typically unoccupied. The system will auto adjust comfort levels when personnel arrive and automatically return to normal when they leave.

Features

- Allows for remote setting and monitoring of HVAC systems
- Detects motion for occupied/non-occupied status
- Prevents unauthorized adjustments or tampering



Free iMonnit basic online wireless sensor monitoring and notification system to configure sensors, view data and set alerts via SMS text and email.

Example Applications

- Office buildings
- Schools and churches
- Stores and restaurants
- Sports and concert venues
- Remote buildings


And may more...

General Specifications


- Wireless Range: 250 - 300 ft. (non-line-of-sight / indoors through walls, ceilings & floors) *
- RF Communication: 900, 920, 868 and 433 MHz

* Actual range may vary depending on environment. (Wi-Fi sensors typical range is up to 100 ft.)

Motion Sensor Specifications

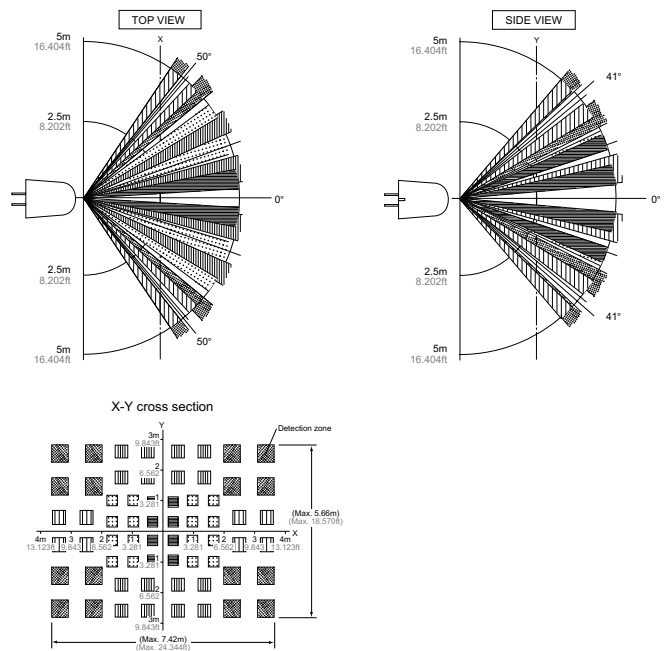

1. The X-Y cross-sectional diagram shows the detection area.
2. The differences in the detection zone patterns are indicative of the projections of the 16 lenses with single focal point and with five optical axes. An object whose temperature differs from the background temperature and which crosses inside the detection zone will be detected.

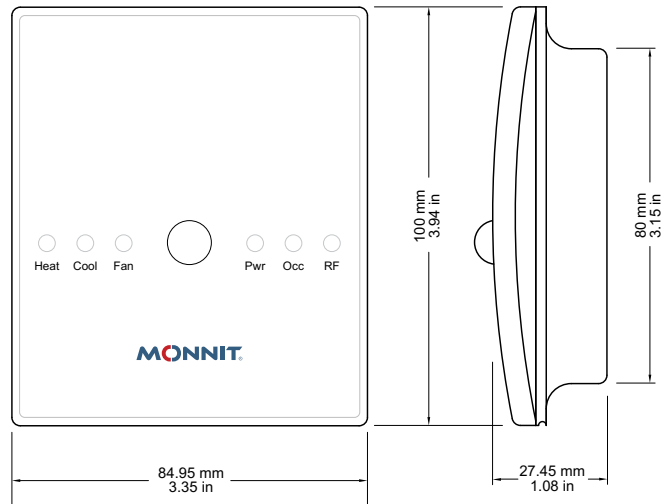

Technical Specifications	
Supply Voltage	2.0 - 3.6 VDC (powered via HVAC system) *
Current Consumption	0.7 μ A (sleep mode) 2 mA (radio idle/off mode) 2 mA (measurement mode) 25 mA (radio RX mode) 35 mA (radio TX mode)
Operating Temperature Range	-40°C to 85°C (-40°F to 185°F) **
Temperature Reading Accuracy	\pm 1% under normal conditions
RH Accuracy	\pm 3% under normal conditions (10% - 90% RH)
RH Operating Range	0 – 100% RH
RH Response Time	8 sec (tau 63%)
Motion Sensor Detection Range	16.4 ft (5 m)
Retard Consumption Current (Standby)	Typ: 170 μ A Max: 300 μ A
Wireless Range	250 - 300 ft. (Through walls, ceilings and floors) Range may vary according to environmental variables
Certifications	900 MHz product; FCC ID: ZTL- RFSC1 and IC: 9794A-RFSC1. 920 MHz product; ARIB STD-T108 R210-103733. 868 and 433 MHz product tested and found to comply with: CISPR 22:2008-09 / EN 55022:2010 - Class B and ETSI EN 300 220-2 V2.4.1 (2012-05).

* Hardware can not withstand negative voltage. Please take care when connecting a power device.

** At temperatures above 100°C, it is possible for the board circuitry to lose programmed memory.

Notes:

Monnit commercial grade products are designed for applications in ordinary environments (normal room temperature, humidity and atmospheric pressure). Do not use these sensors under the following conditions as these factors can deteriorate the product characteristics and cause failures and burn-out.

- Corrosive gas or deoxidizing gas - chlorine gas, hydrogen sulfide gas, ammonia gas, sulfuric acid gas, nitric oxides gas, etc.)
- Volatile or flammable gas
- Dusty conditions
- Under low or high pressure
- Wet or excessively humid locations
- Places with salt water, oils chemical liquids or organic solvents
- Where there are excessively strong vibrations
- Other places where similar hazardous conditions exist

Use these products within the specified temperature range. Higher temperature may cause deterioration of the characteristics or the material quality.

