

## Model JEC-AG DC-DC



## Long Stroke Displacement Transducer

---

### DESCRIPTION

Models JEC-AG (captive guided spring return) dc-dc long stroke displacement transducer utilizes an improved internal circuit which incorporates both reverse polarity protection and voltage regulation. These features eliminate the danger of permanent

damage if supply voltage is accidentally reversed, and ensure that sensitivity will remain constant over large variations in supply voltage. These models require no further conditioning, thus permitting easy operation.

### FEATURES

- Stainless steel construction
- Enhanced life cycle
- Voltage regulation
- Reverse polarity protected
- Single or dual supply wiring (field selectable)
- Captive guided spring return armature
- Not RoHS compliant

# Model JEC-AG DC-DC

## PERFORMANCE SPECIFICATIONS

Characteristic	Measure
Stroke range	±12,7 mm to 76,2 mm [±0.5 in to 3.0 in]
Non-linearity (max.)	±0.25 % full scale
Output load (min.)	2000 ohm with three-wire supply; 20000 ohm with floating supply
Output impedance	2 ohm
Output sensitivity	±5 Vdc or 0 Vdc to 10 Vdc (field selectable)
Isolation	1000 V input to output
Polarity	Output positive for outward stroke

## ENVIRONMENTAL SPECIFICATIONS

Characteristic	Measure
Temperature, operating	-50 °C to 80 °C [-58 °F to 176 °F]
Temperature effect, zero (max.)	0.006 % full scale/°F
Temperature effect, span (max.)	0.017 % full scale/°F

## ELECTRICAL SPECIFICATIONS

Characteristic	Measure
Element type	dc-dc displacement transducer
Power supply, single	24 Vdc to 40 Vdc @ 30 mA
Power supply, dual	±12 Vdc to ±20 Vdc @ 30 mA
Ripple	30 mV peak to peak
Electrical termination	Multiconductor shielded cable (1.83 m [6 ft])
Reverse polarity protection	Yes

## MECHANICAL SPECIFICATIONS

Characteristic	Measure
Case material	Stainless steel
Probe material	Stainless steel
Armature type	Captive guided spring return
Probe thread	Not applicable
Weight	See table
Spring force (max.)	4 oz/in

## RANGE CODES

Range Code	Available ranges
HP	±12,7 mm [±0.5 in]
HQ	±25,4 mm [±1.0 in]
HR	±50,8 mm [±2.0 in]
HS	±76,2 mm [±3.0 in]


## OPTION CODES

Range Code	Many range/option combinations are available in our quick-ship and fast-track manufacture programs. Please see <a href="http://sensing.honeywell.com/TMsensor-ship">http://sensing.honeywell.com/TMsensor-ship</a> for updated listings.
Stroke ranges	±12,7 mm [±0.5 in], ±25,4 mm [±1.0 in], ±50,8 mm [±2.0 in], 6,2 mm [3.0 in]
Electrical termination	Multiconductor shielded cable (1.83 m [6 ft]) TM405. Axial Bendix connector on body radial (side) TM406. Bendix connector on body
Electrical cable orientation	TM49. Axial cable exit
Mounting threads	TM511. 13/16-32 UNF
Improved linearity	L10. ±0.1 % max. linearity

# Long Stroke Displacement Transducer

## MOUNTING DIMENSIONS

Range code	Available stroke range	L	X	Approx. unit weight
HP	±12,7 mm [±0.5 in]	190,5 mm [7.5 in]	38,1 mm [1.5 in]	226,7 g [8 oz]
HQ	±25,4 mm [±1.0 in]	209,6 mm [8.25 in]	63,5 mm [2.5 in]	283,5 g [10 oz]
HR	±50,8 mm [±2.0 in]	326,39 mm [12.85 in]	76,2 mm [3.0 in]	396,9 g [14 oz]
HS	±76,2 mm [±3.0 in]	438,15 mm [17.25 in]	114,3 mm [4.5 in]	510,29 g [18 oz]


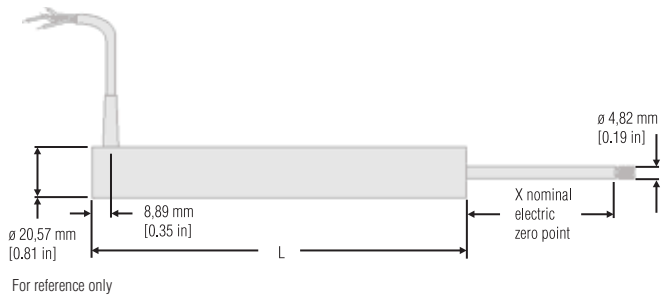


## WIRING CODES

Wire color	Dual supply	Single supply (floating)*	Outputs
Red	12 V to 20 V input	24 V to 40 V input	
Blue	-12 V to -20 V input	Supply negative	
Black	0V, I/P, O/P common		
Yellow			0 V to 10 V
Green			±5 Vdc


\* Output common floats at voltage source/2

## TYPICAL SYSTEM DIAGRAM

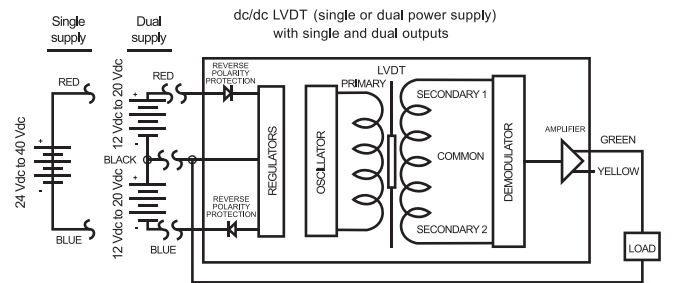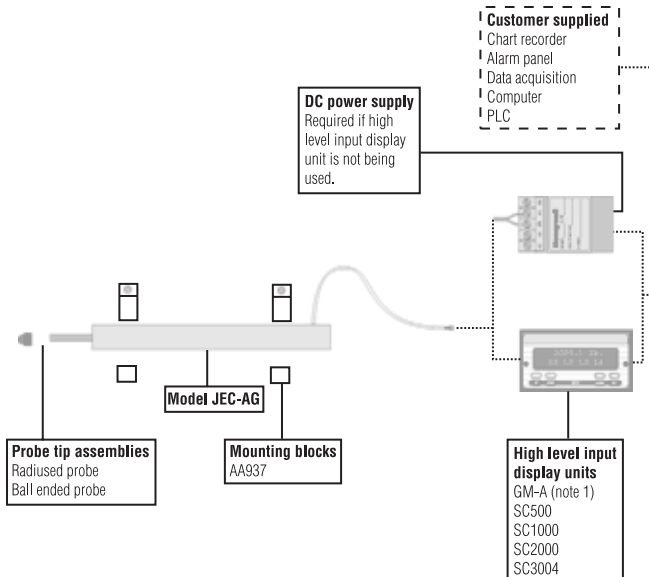

COLOR or PIN	DESIGNATION
Red or PIN A	(+) Supply
Blue or PIN B	(-) Supply
Black or PIN C	(-) Output common/Supply return
Green or PIN D	(+) Output (± 5 Vdc, min. 10K ohm load)
Yellow or PIN E	(+) Output (0 Vdc to 10 Vdc, min. 2K ohm load)
Brown or PIN F	No connection

Note: Supply must be fully floating. Output common floats at  $V_{supply}/2$ .



# Model JEC-AG DC-DC

# Long Stroke Displacement Transducer

## NOTES

1. GM-A should not be used with an amplified displacement transducer unless using an external power supply to power the displacement transducer.

**Warranty.** Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

For more information about Sensing and Control products, visit [www.honeywell.com/sensing](http://www.honeywell.com/sensing) or call +1-815-235-6847  
Email inquiries to [info.sc@honeywell.com](mailto:info.sc@honeywell.com)

### **WARNING** **PERSONAL INJURY**

- DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

**Failure to comply with these instructions could result in death or serious injury.**

### **WARNING** **MISUSE OF DOCUMENTATION**

- The information presented in this catalogue is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

**Failure to comply with these instructions could result in death or serious injury.**

Sensing and Control  
Automation and Control Solutions  
Honeywell  
1985 Douglas Drive North  
Golden Valley, MN 55422 USA  
+1-815-235-6847  
[www.honeywell.com/sensing](http://www.honeywell.com/sensing)

# Honeywell

008762-1-EN IL50 GLO  
May 2008  
Copyright © 2008 Honeywell International Inc. All rights reserved.