



LFS-04

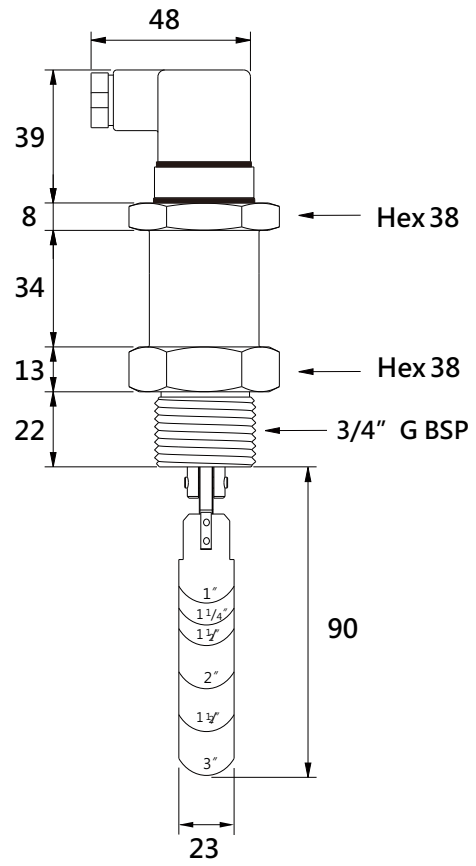


LFS-04	
Mounting Style	Top
Mounting Thread	3/4" G BSP
Contact Rating	60VA/400Vac/dc
Operating Pressure Maxi.	355 PSIG
Operating Temperature	-3°C ~ +100°C
Maximum Pressure Drop	3 PSIG
Switch Repeatability	±5%
Adjustment Accuracy	± 25%
Wetted Material	SUS 304
Housing Material	DIN 43650(EN175301-803)/NEMA 4

LFS-03

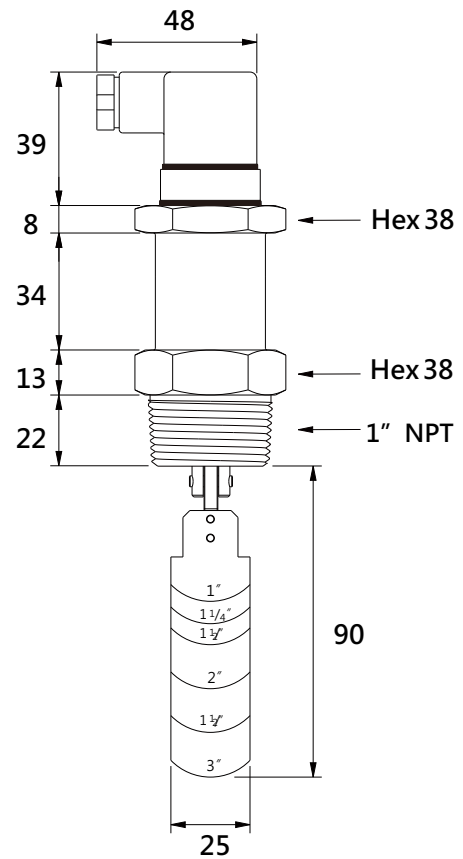

LFS-03	
Mounting Style	Top
Mounting Thread	1" NPT-ANSI
Contact Rating	60VA/400Vac/dc
Operating Pressure Maxi.	355 PSIG
Operating Temperature	-3°C ~ +100°C
Maximum Pressure Drop	3 PSIG
Switch Repeatability	±5%
Adjustment Accuracy	± 25%
Wetted Material	SUS 304
Housing Material	DIN 43650(EN175301-803)/NEMA 4

LFS-03T

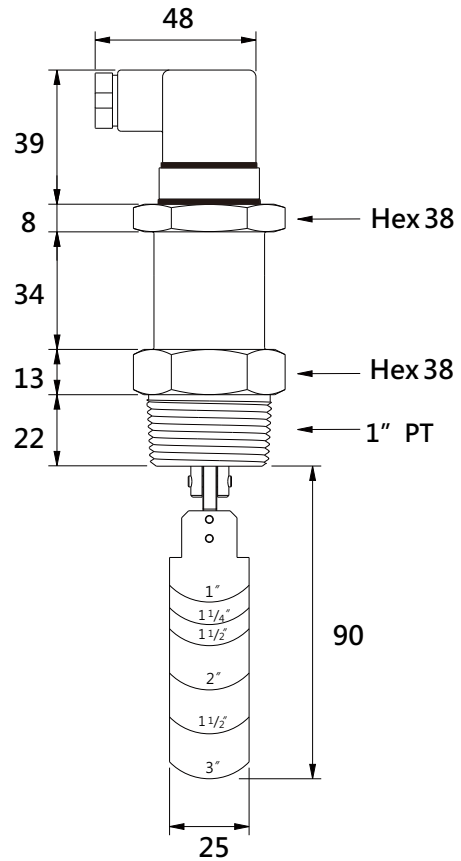

LFS-03T	
Mounting Style	Top
Mounting Thread	1" PT-JIS
Contact Rating	60VA/400Vac/dc
Operating Pressure Maxi.	355 PSIG
Operating Temperature	-3°C ~ +100°C
Maximum Pressure Drop	3 PSIG
Switch Repeatability	±5%
Adjustment Accuracy	± 25%
Wetted Material	SUS 304
Housing Material	DIN 43650(EN175301-803)/NEMA 4