

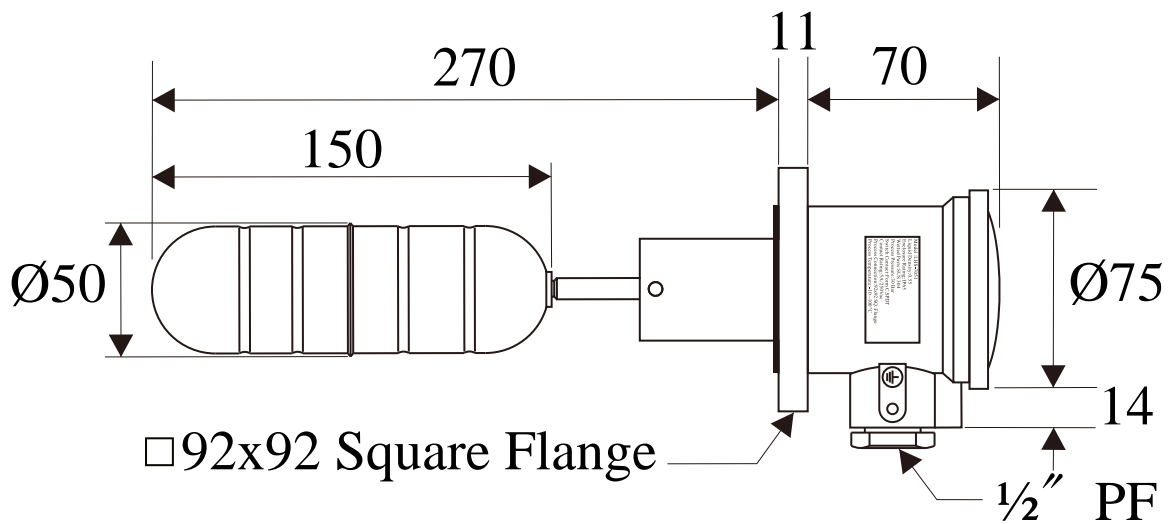
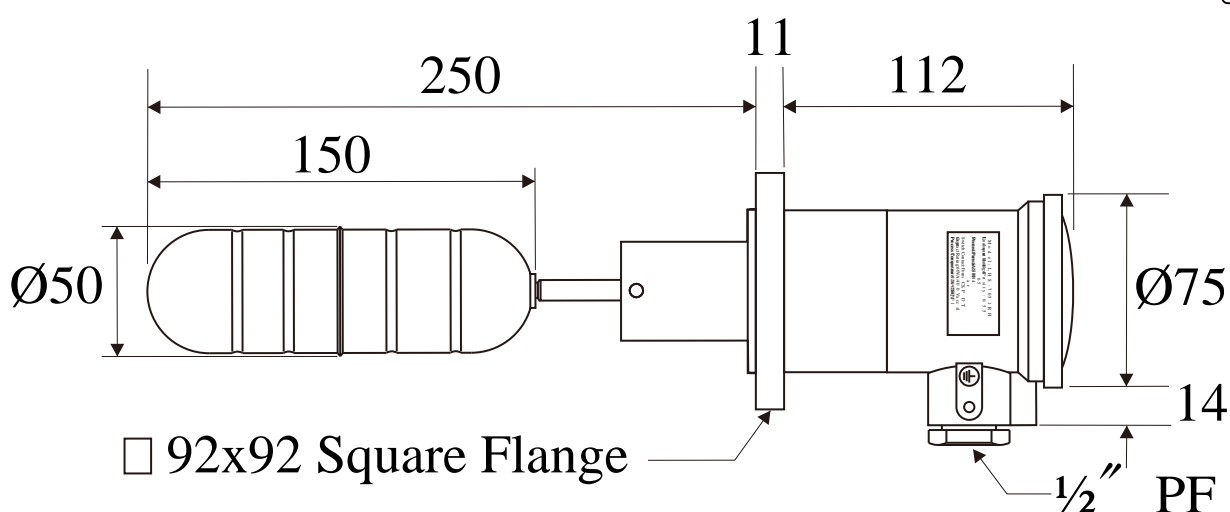


# LHS-7051



Process Connection	$\square 92 \times 92$ Square Flange
Float Dimension & Material	$\text{Ø}50 \times 150$ , SUS 316
Float Specific Gravity(S. G.)	0.55
Process Pressure Maxi.	30 Bar
Switch Contact & Contact Rating	Form C,SPDT,5A/250Vac
Process Operation Temperature	-10°C ~ 100°C
Material of Wetted Parts	SUS 304
Enclosure Rating (IP)	Aluminun/IP 65

# LHS-7051RH

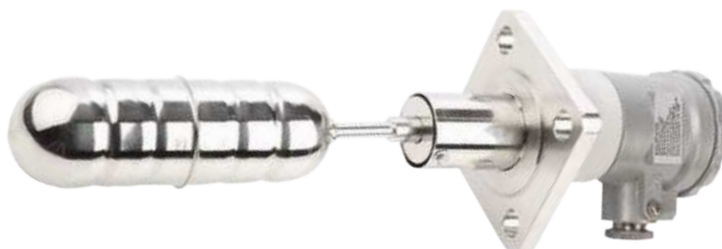

## High Temperature

LFS-01HLHS-7051RH

Process Connection	□ 92x92 Square Flange
Float Dimension & Material	Ø50x150 , SUS 316
Float Specific Gravity(S. G.)	0.55
Process Pressure Maxi.	30 Bar
Switch Contact & Contact Rating	Form C,SPDT,60VA/400Vac/dc
Process Operation Temperature	-10°C ~ 200°C
Material of Wetted Parts	SUS 304
Enclosure Rating (IP)	Aluminun/IP65