



LKS-3612

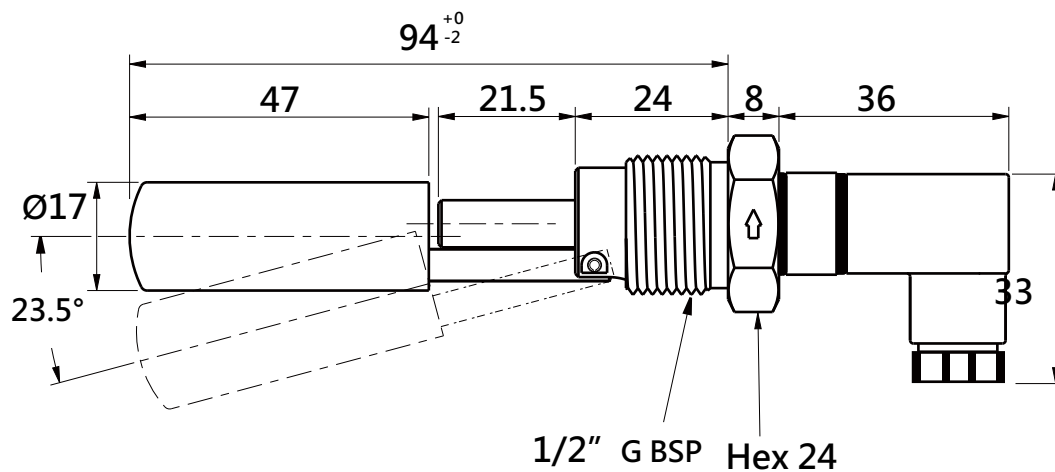


LKS-3612	
Mounting Style	External
Mounting thread	1/2" G BSP
stem	SUS304
Float	SUS316 Ø17x47
Operation Temp.	- 10°C ~ +120°C
Max.Pressure	10 Bar
Float S.G.	0.7
Mini.Fluid S.G.	0.8
Contact Form	N/O(N/C),SPST
Switch Rating VA	50W
Switching Voltage Max.	240Vac/200Vdc
Switching Current Max.	0.5A
Carry Current Max.	1A
Enclosure	DIN43650 (EN175301-803) Connector (NEMA 4/IP65)

LKS-3312

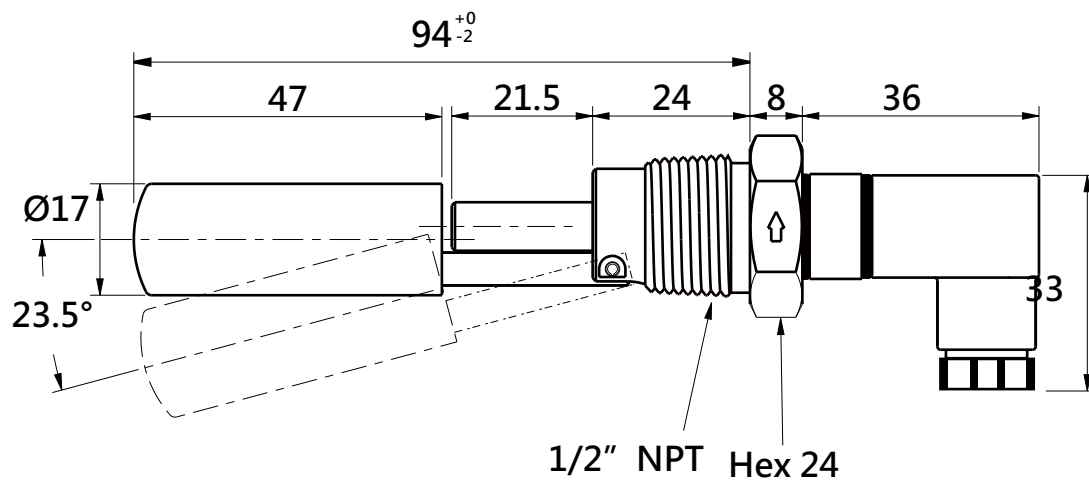


LKS-3312	
Mounting Style	External
Mounting thread	1/2" NPT
stem	SUS304
Float	SUS316 Ø17x47
Operation Temp.	- 10°C ~ +120°C
Max.Pressure	10 Bar
Float S.G.	0.7
Mini.Fluid S.G.	0.8
Contact Form	N/O(N/C),SPST
Switch Rating VA	50W
Switching Voltage Max.	240Vac/200Vdc
Switching Current Max.	0.5A
Carry Current Max.	1A
Enclosure	DIN43650 (EN175301-803) Connector (NEMA 4/IP65)

LKS-3302

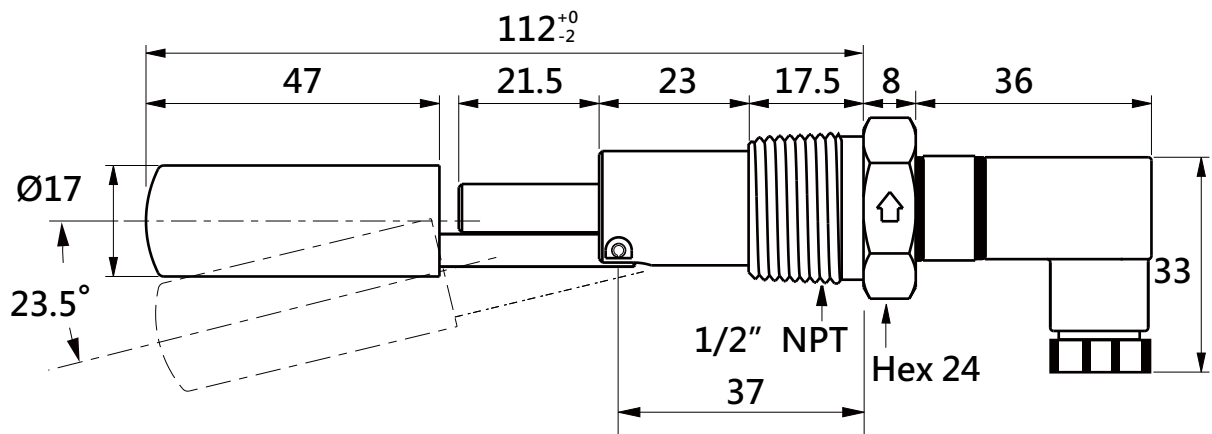


LKS-3302	
Mounting Style	External
Mounting thread	1/2" NPT
stem	SUS304
Float	SUS316 $\varnothing 17 \times 47$
Operation Temp.	- 10°C ~ +120°C
Max.Pressure	10 Bar
Float S.G.	0.7
Mini.Fluid S.G.	0.8
Contact Form	N/O(N/C),SPST
Switch Rating VA	50W
Switching Voltage Max.	240Vac/200Vdc
Switching Current Max.	0.5A
Carry Current Max.	1A
Enclosure	DIN43650 (EN175301-803) Connector (NEMA 4/IP65)

LKS-3342

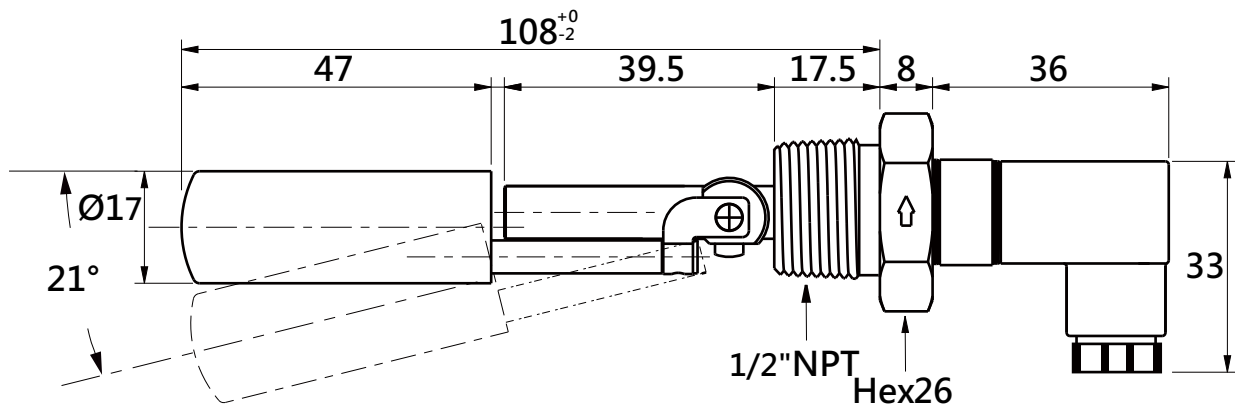

LKS-3342	
Mounting Style	External
Mounting thread	1/2" NPT
stem	SUS304
Float	SUS316 Ø17x47
Operation Temp.	- 10°C ~ +120°C
Max.Pressure	10 Bar
Float S.G.	0.7
Mini.Fluid S.G.	0.8
Contact Form	N/O(N/C),SPST
Switch Rating VA	50W
Switching Voltage Max.	240Vac/200Vdc
Switching Current Max.	0.5A
Carry Current Max.	1A
Enclosure	DIN43650 (EN175301-803) Connector (NEMA 4/IP65)

LKS-3642

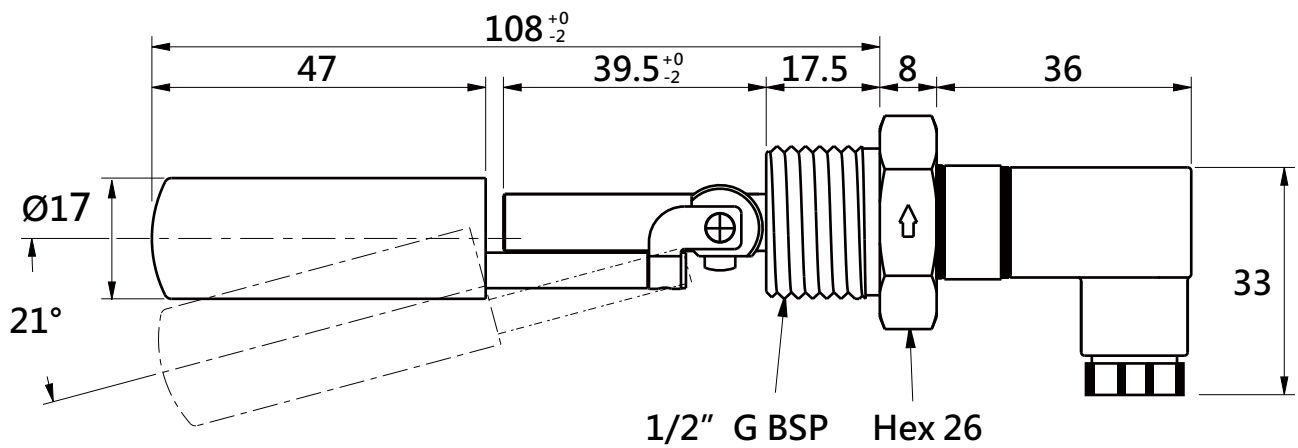

LKS-3642	
Mounting Style	External
Mounting thread	1/2" G BSP
stem	SUS304
Float	SUS316 Ø17x47
Operation Temp.	- 10°C ~ +120°C
Max.Pressure	10 Bar
Float S.G.	0.7
Mini.Fluid S.G.	0.8
Contact Form	N/O(N/C),SPST
Switch Rating VA	50W
Switching Voltage Max.	240Vac/200Vdc
Switching Current Max.	0.5A
Carry Current Max.	1A
Enclosure	DIN43650 (EN175301-803) Connector (NEMA 4/IP65)