# Transducer Display and Signal Conditioning Unit

#### **DESCRIPTION**

The SC series models are self-calibrating microprocessor-based transducer signal conditioners when used with sig mod equipped transducers. Indicators are available with several different types of input channels and output channels. When used with unamplified strain gage transducers that have the signature calibration module installed, these instruments will completely self calibrate zero, span, decimal point, and engineering units automatically.

Input channels are available for a variety of transducers. Each input channel includes an excitation power supply and either an isolated voltage or isolated current analog output.

- Unamplified pressure or load
- Pressure or load with internal voltage amplifiers
- Pressure or load with internal or external two-wire current amplifiers
- ac/ac displacement transducer
- dc/dc displacement transducer
- RTD temperature probes (Pt100)

Available output channels for the SC2000 include:

- Contact relays for the four standard limits or additional limits (max. 16 limits/chassis)
- Isolated digital-to-analog voltage (±5 Vdc or 0 Vdc to 10 Vdc) or current (4 mA to 20 mA)

In addition to the physical input and output channels, up to seven virtual channels can be configured to assist in many potential applications.

#### Four channel chassis

The models SC1000 and SC2000 can hold up to four physical channels in their 3/8 DIN Aluminum bench-top chassis. A bright, dual-line 16-character display can display 5, 6 or 7 numeric digits; simply press a button to select the next channel to be viewed. If configured for split-screen operation, up to four channel values can be displayed at the same time. The SC2000 includes four open collector limit (alarm) outputs plus peak and valley detection.

#### **FEATURES**

- One to four channels
- ±6 digit display
- "Sig cal" auto setup
- Up to 800 Hz frequency response, field selectable
- Pressure, load, displacement transducer, voltage, current, strain gage based sensor input
- Alarm outputs
- CE approved

### **GENERAL SPECIFICATIONS**

Characteristic	Measure
Model	SC1000/SC2000
Number of physical channels	1 to 4
Number of virtual channels	1 to 7
Case material	Aluminum
Form factor	3/8 DIN
Mounting	Bench (standard)
Size (W x H x D)	142,24 mm x 71,12 mm x 222,25 mm [5.6 in x 2.8 in x 8.75 in]
Weight	1,81 kg [4 lb]

### **DISPLAY SPECIFICATIONS**

Characteristic	Measure
Number of displays	1
Number of lines/display	2
Number of characters/line	16
Scaling	Automatic or manual setup
Max. display count	9999999
Decimal point selection	0 to 5
Display type	Vacuum/Fluorescent

### **ENVIRONMENTAL SPECIFICATIONS**

Characteristic	Measure
Temperature, storage	-29 °C to 93 °C [-20 °F to 200 °F]
Temperature, operating	4 °C to 41 °C [40 °F to 105 °F]

### SPECIAL FEATURES (SC2000 ONLY) SPECIFICATIONS

Characteristic	Measure
Limits setup	Front panel
Limits output, standard	Open-collector
Limits output, relay output channel	Contact relays
Limits quantity	4 std., 16 max. (contact relays)
Peak/valley hold on input channels	Yes
Digital, isolated control inputs	4
Approvals	CE approved (except vehicle powered unit)
Interfaces	Signature calibration

### **COMMUNICATIONS SPECIFICATIONS**

Characteristic	Measure
Serial setup and output	RS-232/RS-485
Isolation	500 V
Max. baud rate	38400

### **POWER SPECIFICATIONS**

Characteristic	Measure		
Standard ac powered	100 Vac to 230 Vac, 47 Hz to 63 Hz		
Excitation drive	120 mA max.		

Not RoHS compliant

### **INPUT AMPLIFIER CARDS**

All input cards include non-isolated, open collector control inputs that can be field configured for any one of the following functions: 1) track hold, 2) peak/valley hold, 3) tare on, and 4) tare off.

Input	Strain gage millivolts	High level volts/mA	RTD mil- livolts	ac/ac dis- placement transducer
Transduc- er type	Unamplified sensors	Amplified pressure or load, dc/ dc dis-placement transducer	Platinum 100 ohm, alpha = 0.00385	ac/ac dis- placement transducer
Ranges*	0.5 mV/V to 11 mV/V @ 5 V 0.5 mV/V to 5.5 mV/V @ 10 V	±5 Vdc or ±10 Vdc, 4 mA to 20 mA	-200 °C to 800 °C [-328 °F to 1472 °F]	0.1 VRMS to 15 VRMS
Frequency response	See table below	See table below	See table below	See table below
Resolu- tion	See table below	See table below	See table below	See table below
Calibra- tion type	Shunt; mV/V; 2-, 3-, or 5-point known load	Shunt; 2-, 3-, or 5-point known load	2-, 3-, or 5-point known load	2-, 3-, or 5-point known load
Trans- ducer excitation	5 Vdc or 10 Vdc with sense	±15 Vdc, 28 Vdc, or 12 Vdc	10 Vdc	3 Vac @ 3 kHz
Push but- ton 100 % tare	Yes	Yes	N/A	Yes
Push but- ton shunt test	Yes	Yes	N/A	Yes

<sup>\*</sup> Ranges are field programmable, except for RTD input

### Transducer Display and Signal Conditioning Unit


### **OUTPUT**

Output	Strain gage millivolts	High level volts/mA	RTD mil- livolts	ac/ac displace- ment trans- ducer
Voltage range (field selectable)	5 Vdc, ±5 Vdc, 10 Vdc, ±10 Vdc			
Current range	4 mA to 20 mA			
Source	Any chan- nel	Any chan- nel	Any chan- nel	Any chan- nel
Isolation	500 V	500 V	500 V	500 V
Resolution	13 bits	13 bits	13 bits	13 bits
Frequency response	Same as input	Same as input	Same as input	Same as input


# Resolution (counts) (not including min. 10 % overrange/underrange capability)

Frequency response (Hz) field selectable	Step response (ms) typi- cal	Strain gage/RTD	High level	ac/ac displace- ment trans- ducer
2 (fast mode)	40	±50000	±50000	±25000
2	440	±50000	±50000	±25000
8	110	±25000	±25000	±15000
16	55	±20000	±25000	±10000
32	28	±10000	±20000	±10000
50	16	±5000	±15000	±5000
100	8	±5000	±10000	±5000
250	3	±2000	±10000	±2000
500	2	±2000	±4000	±2000
800	2	±2000	±2500	±2000


#### MOUNTING DIMENSIONS AND CHARACTERISTICS

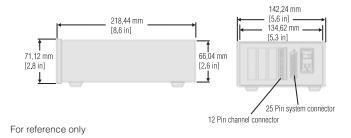


#### **TYPICAL SYSTEM DIAGRAM**

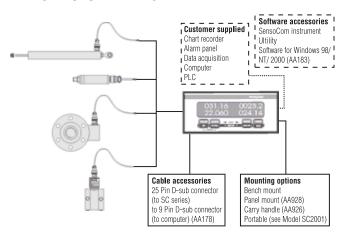

### FLEXIBLE AND EXPANDABLE PLATFORM OPTIONS

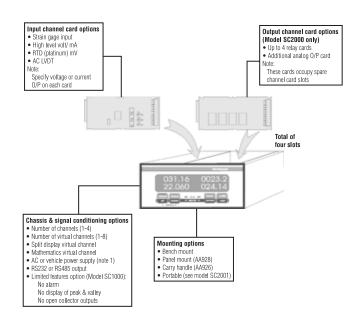


### **SC2000 CAPABILITIES**

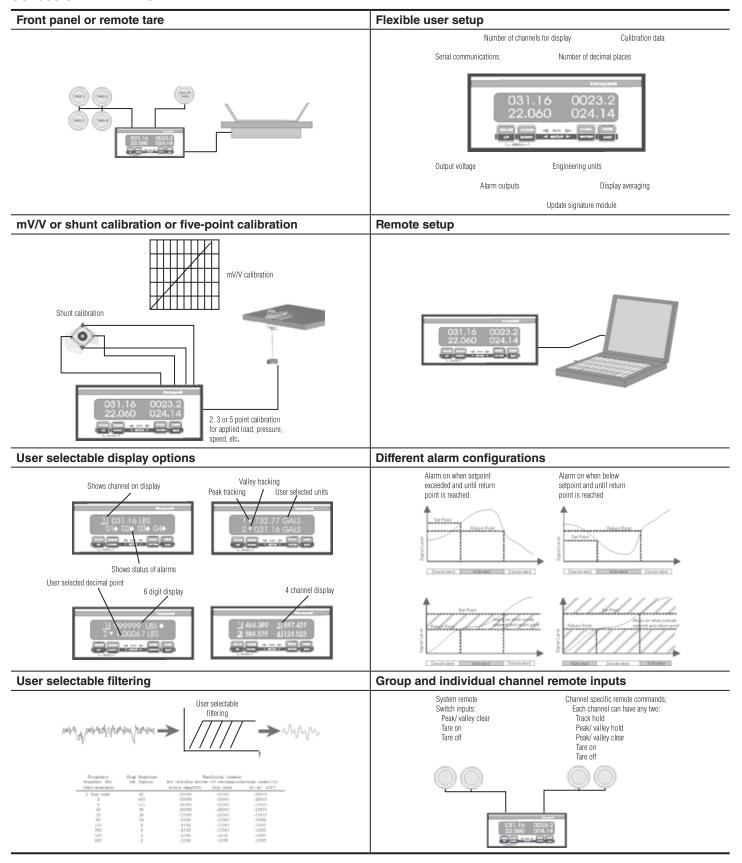

### Transducer Display and Signal Conditioning Unit

### **SC2000 CAPABILITIES**

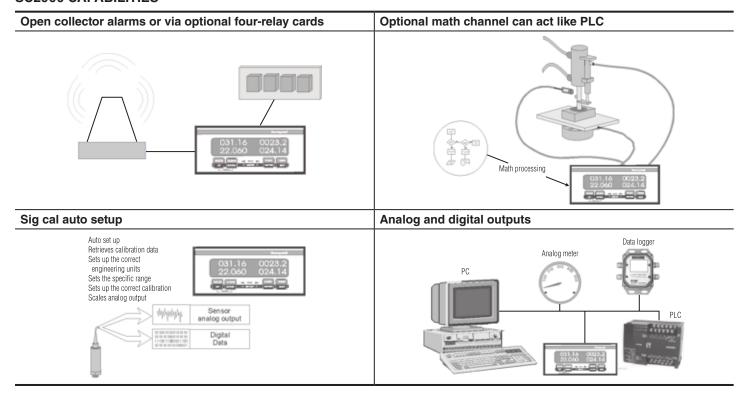

### Transducer Display and Signal Conditioning Unit

Warranty. Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. The foregoing is buyer's sole remedy and is in lieu of all warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

For more information about Sensing and Control products, visit www.honeywell.com/sensing or call +1-815-235-6847 Email inquiries to info.sc@honeywell.com



• DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

## WARNING MISUSE OF DOCUMENTATION

- The information presented in this catalogue is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

Sensing and Control
Automation and Control Solutions
Honeywell
1985 Douglas Drive North
Golden Valley, MN 55422 USA
+1-815-235-6847

Honeywell