

## Model UG

### Ultra Precision Universal Canister Load Cell



#### DESCRIPTION

Model UG Ultra Precision Universal load cell achieves scale quality and performance standards. The Model UG achieves  $\pm 0.03$  % non-linearity with very little deflection (typically .0045 in). It utilizes a four arm strain gage bridge which is bonded and tested for high precision and dependability. Female threads

on both ends facilitate mounting in any position for tension, compression, or universal force measurements. Model UG load cells can be used in both static and dynamic applications. Stainless steel construction ensures high reliability.

#### FEATURES

- 5 lb to 50000 lb
- 0.03 % non-linearity and hysteresis, respectively
- Stainless steel
- Mini footprint
- Button-style design
- mV/V output

# Model UG

## PERFORMANCE SPECIFICATIONS

Characteristic	Measure
Load ranges <sup>12</sup>	100 lb to 150000 lb
Non-linearity	±0.03 % full scale <sup>1</sup>
Hysteresis	±0.03 % full scale <sup>1</sup>
Non-repeatability	±0.02 % full scale
Output (tolerance)	3 mV/V ±1 %
Load direction	Tension/compression <sup>4</sup>
Resolution	Infinite
Creep (max.)	0.02 % (20 min.)

## ENVIRONMENTAL SPECIFICATIONS

Characteristic	Measure
Temperature, operating	-34 °C to 85 °C [-30 °F to 185 °F] <sup>5</sup>
Temperature, compensated	15 °C to 71 °C [60 °F to 160 °F] <sup>5</sup>
Temperature, storage	-73 °C to 121 °C [-100 °F to 250 °F]
Temperature effect, zero	0.0015 % full scale/°F
Temperature effect, span	0.0008 % full scale/°F

## ELECTRICAL SPECIFICATIONS

Characteristic	Measure
Strain gage type	Bonded foil
Excitation (calibration)	10 Vdc
Insulation resistance	5000 mOhm @ 50 Vdc
Bridge resistance	350 ohm
Zero balance	1 % of full scale
Electrical termination (std)	MS3102E-14S-6P
Mating connector (not included)	MS3106A-14S-6S (AA121)

## MECHANICAL SPECIFICATIONS

Characteristic	Measure
Maximum allowable load	150 % FS <sup>2</sup>
Material	Stainless steel

## WIRING CODES


Connector	Unamplified
<b>A</b>	(+) excitation
<b>B</b>	(+) excitation
<b>C</b>	(-) excitation
<b>D</b>	(-) excitation
<b>E</b>	(-) output
<b>F</b>	(+) output

## RANGE CODES

Range Code	Available ranges	Range Code	Available ranges
<b>BR</b>	100 lb	<b>DV</b>	10000 lb
<b>CN</b>	250 lb	<b>EJ</b>	15000 lb
<b>CR</b>	500 lb	<b>EL</b>	20000 lb
<b>CV</b>	1000 lb	<b>EN</b>	30000 lb
<b>DL</b>	2000 lb	<b>EP</b>	50000 lb
<b>DN</b>	3000 lb	<b>ER</b>	75000 lb
<b>DP</b>	4000 lb	<b>ET</b>	100000 lb
<b>DR</b>	5000 lb	<b>FJ</b>	150000 lb
<b>DT</b>	7500 lb		

## MOUNTING DIMENSIONS

Range lb	H mm [in]	ØD1 mm [in]	ØD2 mm [in]	ØD3 mm [in]	A mm [in]	T
100	69,85 [2.75]	50,8 [2.00]	16,00 [0.63]	48,26 [1.9]	2,29 [0.09]	3/8-24 UNF x 7/16 in
250, 500	69,85 [2.75]	50,8 [2.00]	16,00 [0.63]	48,26 [1.9]	4,57 [0.18]	3/8-24 UNF x 7/16 in
1000, 2000, 3000, 4000	104,90 [4.13]	63,5 [2.50]	19,05 [0.75]	50,8 [2.00]	4,57 [0.18]	1/2-20 UNF x 5/8 in
5000, 7500, 10000	149,35 [5.88]	88,9 [3.50]	39,62 [1.56]	76,2 [3.00]	4,83 [0.19]	1-14 UNF x 1 1/8 in
15000, 20000, 30000	215,9 [8.50]	127 [5.00]	60,45 [2.38]	109,22 [4.3]	16,00 [0.63]	1 1/2-12 UNF x 2 in
50000, 75000	304,8 [12.00]	152,4 [6.00]	92,20 [3.63]	139,7 [5.5]	17,53 [0.69]	2-12 UNF x 2 1/2 in
100000, 150000	401,32 [15.80]	190,5 [7.5]	121,92 [4.8]	172,72 [6.8]	17,53 [0.69]	3-8 UNF x 4 1/2 in

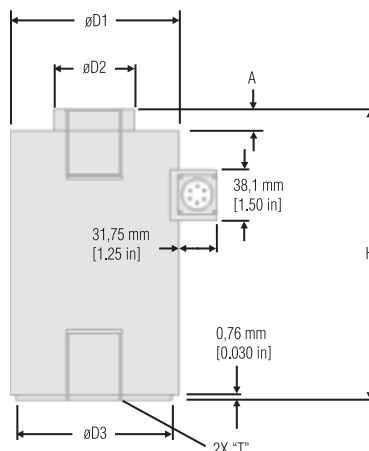


## Ultra Precision Universal Canister Load Cell

### INTERNAL AMPLIFIERS

Amplifier specifications	Voltage output: Option 2b	Voltage output: Option 2c	Voltage output: Option 2t	Current three-wire: Option 2j	Current two-wire: Option 2k	Intrinsically safe amp: Option 2n (2N)***
<b>Output signal</b>	±5 V	0 V to 5 V or ±5 V @ 45 mA	0 V to 10 V or ±10 V @ 45 mA	4 mA to 20 mA	4 mA to 20 mA	4 mA to 20 mA
<b>Input power (voltage)</b>	±15 V or 26 Vdc to 32 Vdc	11 Vdc to 28 Vdc	15 Vdc to 28 Vdc	22 Vdc to 32 Vdc	15 Vdc to 40 Vdc	9 Vdc to 28 Vdc
<b>Input power (current)</b>	45 mA	40 mA	40 mA	65 mA	4 mA to 28 mA	4 mA to 24 mA
<b>Freq. resp (amp)</b>	3000 Hz	3000 Hz	3000 Hz	2500 Hz	300 Hz	2000 Hz
<b>Power supply rej.</b>	60 db	60 db	60 db	60 db	60 db	60 db
<b>Operating temp.</b>	-20 °F to 185 °F	-20 °F to 185 °F	-20 °F to 185 °F	0 °F to 185 °F	0 °F to 185 °F	-20 °F to 185 °F
<b>Reverse voltage protection</b>	Yes	Yes	Yes	Yes	Yes	Yes
<b>Short cir. protection</b>	Momentary	Momentary	Momentary	Yes	Yes	Yes
<b>Wiring code: connector (std)</b>	A (+) Supply B Output common C Supply return D (+) Output E Shunt cal 1 F Shunt cal 2	A (+) Supply B Output common** C Supply return ** D (+) Output E Shunt cal 1 F Shunt cal 2	A (+) Supply B Output common** C Supply return** D (+) Output E Shunt cal 1 F Shunt cal 2	A (+) Supply B Output common** C Supply return** D (+) Output E Shunt cal 1 F Shunt cal 2	A (+) Supply B No connection C No connection D (+) Output E Case ground F No connection	A (+) Supply B No connection C No connection D (+) Output E Case ground F No connection
<b>Wiring code: cable<sup>5,6,7</sup></b>	R (+) Supply BI Output common G Supply return W (+) Output B Shunt cal 1 Br Shunt cal 2	R (+) Supply BI Output common* G Supply return* W (+) Output B Shunt cal 1 Br Shunt cal 2	R (+) Supply BI Output common* G Supply return* W (+) Output B Shunt cal 1 Br Shunt cal 2	R (+) Supply BI Output common* G Supply return* W (+) Output B Shunt cal 1 Br Shunt cal 2	R (+) Supply BI (+) Output W Case ground	R (+) Supply BI (+) Output W Case ground

### TYPICAL SYSTEM DIAGRAM

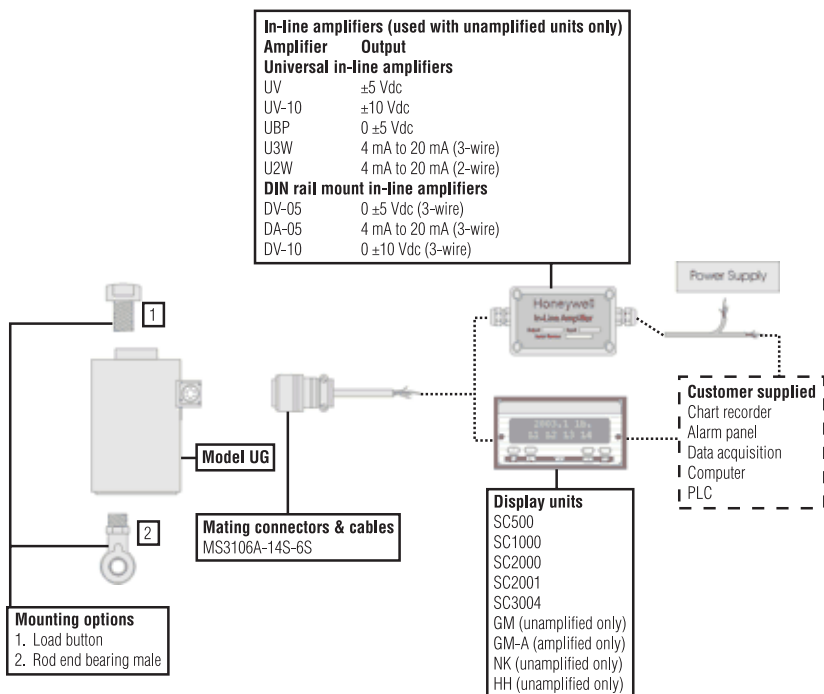

# Model UG

## OPTION CODES

	<b>Many range/option combinations are available in our quick-ship and fast-track manufacture programs. Please see <a href="http://sensing.honeywell.com/TMsensor-ship">http://sensing.honeywell.com/TMsensor-ship</a> for updated listings.</b>	
<b>Load ranges</b>	100, 250, 500, 1000, 2000, 3000, 4000, 5000, 7500, 10000, 15000, 20000, 30000, 50000, 75000, 100000, 150000 lb	
<b>Temperature compensation</b>	1a. 60 °F to 160 °F 1b. 30 °F to 130 °F 1c. 0 °F to 185 °F 1d. -20 °F to 200 °F 1e. -20 °F to 200 °F 1f. 70 °F to 250 °F	1g. 70 °F to 325 °F <sup>14</sup> 1h. 70 °F to 400 °F <sup>14</sup> 1i. -65 °F to 250 °F <sup>14</sup> 1j. 0 °C to 50 °C 1k. -20 °C to 85 °C 1m. -25 °C to 110 °C
<b>Internal amplifiers</b>	2b. ±5 Vdc 2c. 0 Vdc to 5 Vdc output 2j. 4 mA to 20 mA (three-wire) out 2k. 4 mA to 20 mA (two-wire) <sup>13</sup>	2n (2N) 4 mA to 20 mA (wire) intrinsically safe <sup>13</sup> 2t. 0 Vdc to 10 Vdc 2u. Unamplified, mV/V output
<b>Electrical termination</b>	6a. Bendix PTIH-10-6P (or equivalent) 6-pin (max. 250 °F) 6b. MS connector MS3102E-14S-6P (mates with MS3106E-14S-6S) (max. 160 °F) <sup>16</sup> 6e. Integral cable: Teflon	6g. Integral cable: Neoprene 6i. Submersible cable <sup>15</sup> 6j. 1/2-14 conduit fitting with 5 ft of 4 conductor PVC cable 6q. Integral cable: Polyurethane
<b>Shunt calibration</b>	8a. Precision internal resistor <sup>14</sup>	
<b>Bridge resistance</b>	12b. 5000 ohm (foil) 11a. Square bridge <sup>14</sup> 11b. Symmetrical bridge <sup>14</sup> 11c. Square and symmetrical bridge <sup>14</sup>	
<b>Special calibration</b>	30a. Compression only calibration, positive in compression 30b. Tension and compression calibration, positive in tension 30c. Compression only calibration, negative in compression	
<b>Shock and vibration</b>	44a. Shock and vibration resistance	
<b>Interfaces</b>	53e. Signature calibration <sup>14</sup> 53t. TEDS IEEE 1451.4 module <sup>9</sup>	

# Model UG

# Ultra Precision Universal Canister Load Cell

## NOTES

1.  $\pm 0.05\%$  full scale less than or equal to 250 lb and greater than or equal to 75000 lb.
2. Allowable maximum loads - maximum load to be applied without damage.<sup>3</sup>
3. Without damage – loading to this level will not cause excessive zero shift or performance degradation. The user must consider fatigue life for long term use and structural integrity. All structurally critical applications (overhead loading, etc.) should always be designed with safety redundant load paths.
4. Standard calibration for tension/ compression load cells is in tension only.
5. Interconnecting shunt cal. 1 terminal with shunt cal. 2 terminal provides 50 % (unamplified units), 75 % (4 mA to 20 mA three-wire units) or 80 % (voltage amplified units) of full scale output for quick calibration. Shunt calibration comes standard with internal amplifier option 2b, 2c, 2t and 2j.
6. O=Orange; Y=Yellow; B=Blue; Bl=Black; R=Red; Br=Brown; W=White; G=Green. Color specifying cable and number or letter specifying connector.
7. No mating connector necessary for cable option.
8. Consult factory for extended temperature ranges.
9. Consult factory for TEDS availability with amplified models.
10. Range dependent; consult factory. Termination dependent; consult factory.
11. Internal amp and termination dependent; consult factory.
12. This unit calibrated to Imperial (non-Metric) units.
13. 5000 ohm bridge required
14. Not available with amplified options.
15. Temperature 82 °C [180 °F] max., non-shielded standard, shielded available.
16. Cannot be used with options 1c, 1e, 1f, 1g, 1h, or 1i.

**Warranty.** Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

For more information about Sensing and Control products, visit [www.honeywell.com/sensing](http://www.honeywell.com/sensing) or call +1-815-235-6847

Email inquiries to [info.sc@honeywell.com](mailto:info.sc@honeywell.com)

### **WARNING** **PERSONAL INJURY**

- DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

**Failure to comply with these instructions could result in death or serious injury.**

### **WARNING** **MISUSE OF DOCUMENTATION**

- The information presented in this catalogue is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

**Failure to comply with these instructions could result in death or serious injury.**

Sensing and Control  
Automation and Control Solutions  
Honeywell  
1985 Douglas Drive North  
Golden Valley, MN 55422 USA  
+1-815-235-6847  
[www.honeywell.com/sensing](http://www.honeywell.com/sensing)

008643-1-EN IL50 GLO  
May 2008  
Copyright © 2008 Honeywell International Inc. All rights reserved.

# Honeywell