




LCS-2620-U/L/D

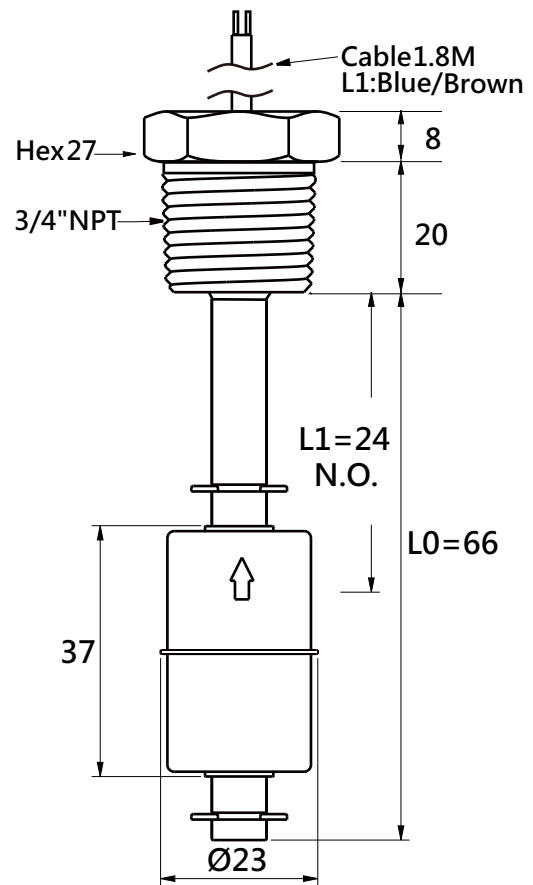

LCS-2620-U/L/D

Mounting Style	External
Mounting thread	3/4" NPT
stem	SUS 304
Float	SUS 316L
Operation Temp.	-20°C To +120°C
Max.Pressure	20 bar
Float S.G.	0.85
Mini.Fluid S.G.	0.9
Contact Form	SPST
Switch Rating VA	50W
Switching Voltage Max.	240Vac/200Vdc
Switching Current Max.	0.5
Carry Current Max.	1A
Lead Wires	UL 3266 AWG 22 XLPE Lead Wire 1M

LCS-2620-ZU/ZL/ZD

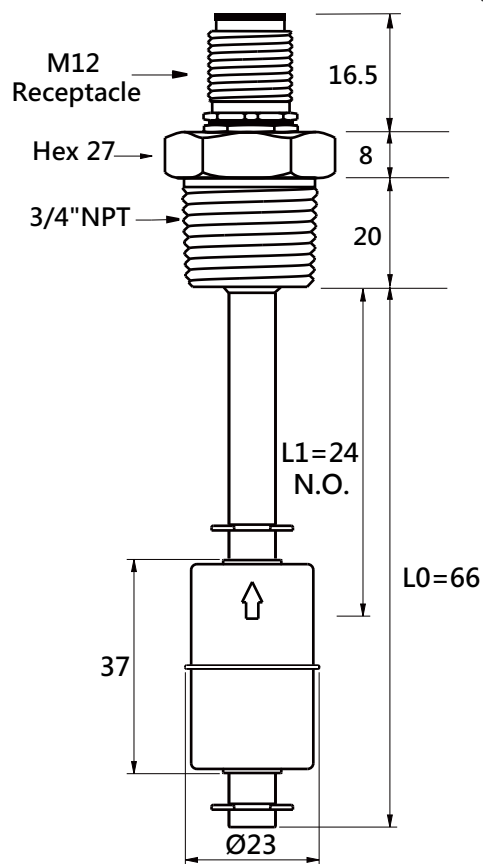

LCS-2620-ZU/ZL/ZD	
Mounting Style	External
Mounting thread	3/4" NPT/M12 Receptacle
stem	SUS 304
Float	SUS 316L
Operation Temp.	-20°C To +120°C
Max.Pressure	20 bar
Float S.G.	0.85
Mini.Fluid S.G.	0.9
Contact Form	SPST
Switch Rating VA	50W
Switching Voltage Max.	240Vac/200Vdc
Switching Current Max.	0.5
Carry Current Max.	1A
Lead Wires	M12 Receptacle