



LCS-3122-XXX

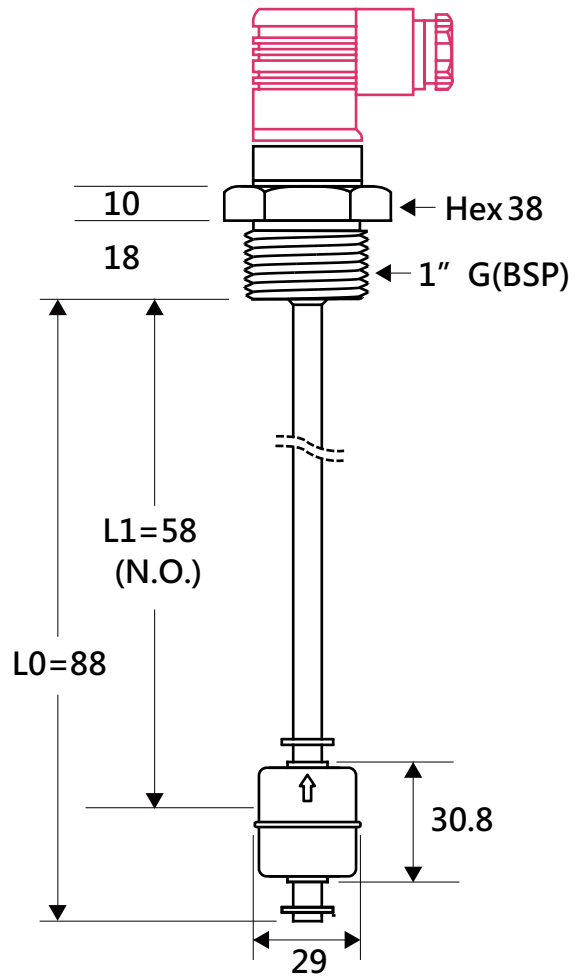

LCS-3122-XXX	
Mounting Style	Internal
Mounting thread	1" G BSP
stem	SUS 316
Float	SUS 316L
Operation Temp.	-20°C To +120°C
Max.Pressure	25 bar
Float S.G.	0.85
Mini.Fluid S.G.	0.9
Contact Form	SPST
Switch Rating VA	50W
Switching Voltage Max.	240Vac/200Vdc
Switching Current Max.	0.5
Carry Current Max.	1A
Lead Wires	DIN43650(EN175301-803) /NEMA 4

LCS-3322-XXX

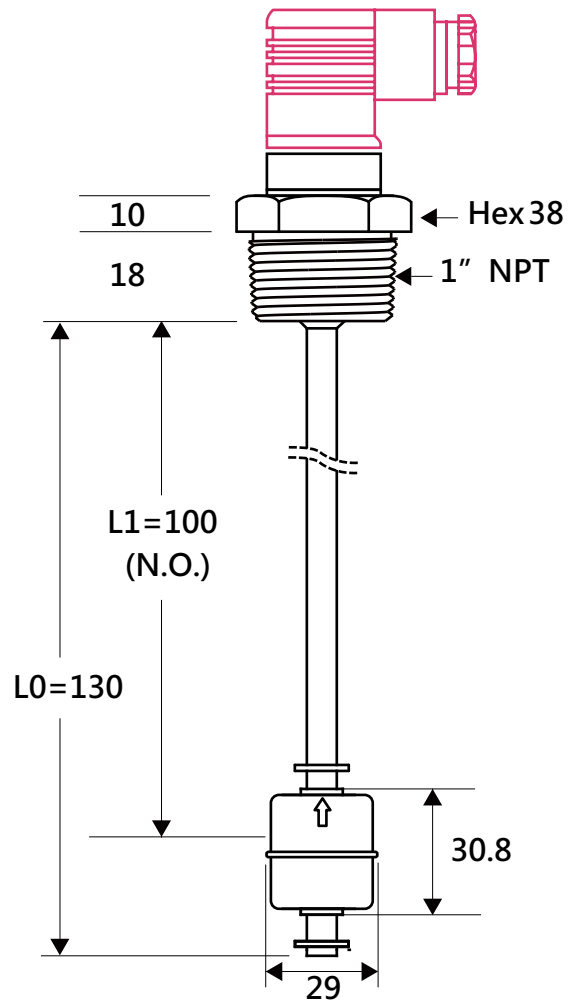

LCS-3322-XXX	
Mounting Style	Internal
Mounting thread	1" NPT
stem	SUS 316
Float	SUS 316L
Operation Temp.	-20°C To +120°C
Max.Pressure	20 bar
Float S.G.	0.85
Mini.Fluid S.G.	0.9
Contact Form	SPST
Switch Rating VA	50W
Switching Voltage Max.	240Vac/200Vdc
Switching Current Max.	0.5
Carry Current Max.	1A
Lead Wires	DIN43650(EN175301-803) /NEMA 4